

Fusion HRV2/HRV2HT

Heat Recovery Unit



EST Best Practice Compliant

Fusion HRV2

As low as 0.46 w/l/sec with 93% HR

Simple on site commissioning on site via 100% variable airflow controls

Acoustically insulated casing ensures quiet operation

Designed for quick and simple installation on site

Integral frost protection and filters

Lightweight 18kg, can be installed by single fitter

Carbon Neutral

Integral Frost Protection sensor

Fuss Free John Guest condensate connector

Fusion HRV2HT

As HRV2 plus

Simple on site commissioning via new wireless GRF1 controller

Optional GRF2 boost switch can be mounted at numerous locations

Building Management System (BMS) compatible

Integral humidistat with Greenwood HumidiSMART

Includes Greenwood TimerSMART




VentRite
Unit 163
315 Chiswick High Road
London W4 4HH


Tel: 0845 467 9197
Info@VacAndVent.co.uk

Ventrite is a trading name of Vacrite Ltd


VR222

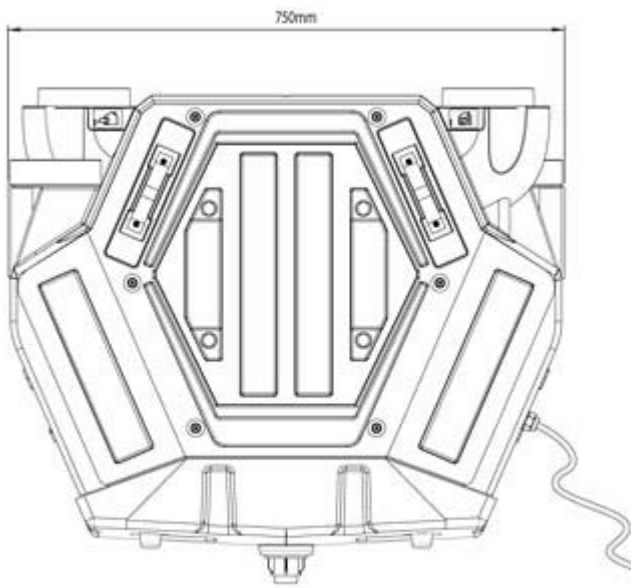

Front View

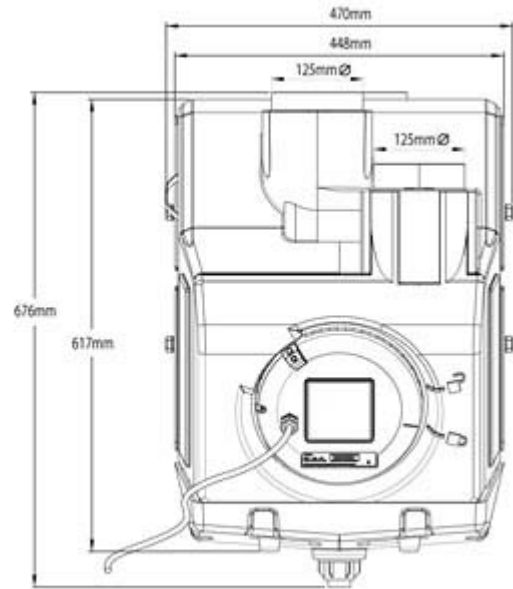

Side View

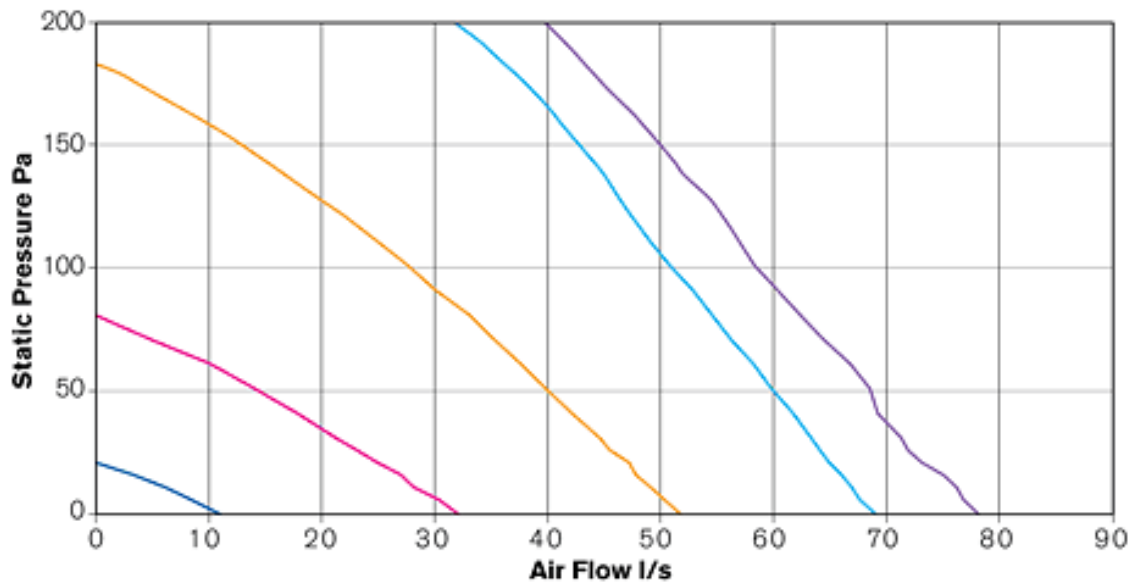

Fusion HRV2HT has 100% variable motors which are commissioned via the wireless GRF1 controller.

- Variable setting 1
- Variable setting 2 (factory trickle speed)
- Variable setting 3
- Variable setting 4 (factory boost speed)
- Variable setting 5 (max)

Consumption

- Trickle speed – 9.8W
- Boost speed – 22W
- Max speed – 75.2W

| Sound Pressure Level @ 3m dB(A) Variable Settings | | | | |
|------------------------------------------------------|------|------|------|----|
| 1 | 2 | 3 | 4 | 5 |
| 14.5 | 25.5 | 31.5 | 35.5 | 38 |